
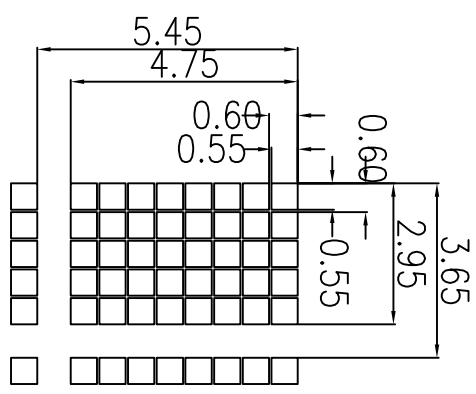
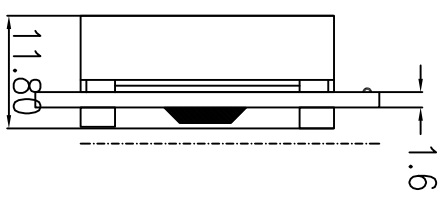


REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED

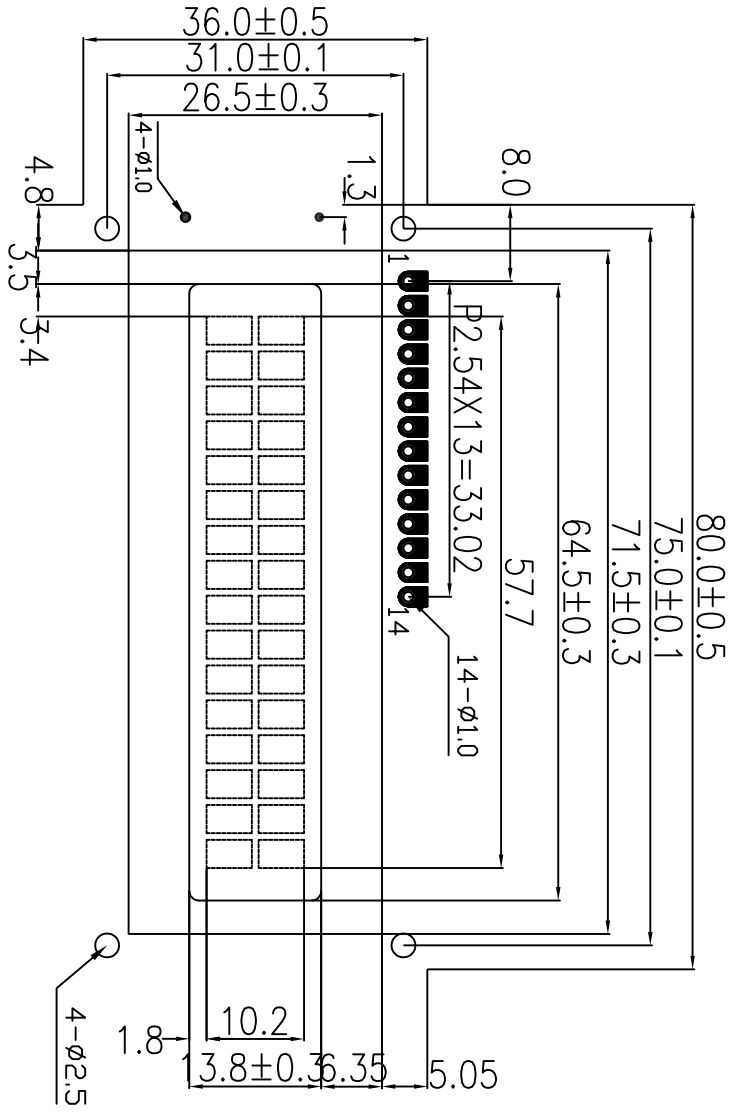

PIN NO.	1	2	3	4	5	6	7~14
SYMBOL	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>O</sub>	R <sub>S</sub>	R/ $\bar{W}$	E	DB0~DB7

**NOTE:**

1. MODE: STN-TRANSFLECTIVE-POSITIVE-Y/G-UV
2. 1/16 DUTY, 1/5BIAS, VOP=5.0V
3. VIEWING DIR.: 6:00
4. OP. TEMP.: -20~70°C
5. ST. TEMP.: -30~80°C
6. VDD=5.0V